



DYNAPAC

Part of the Atlas Copco Group

F141C Tracked pavers



Technical data

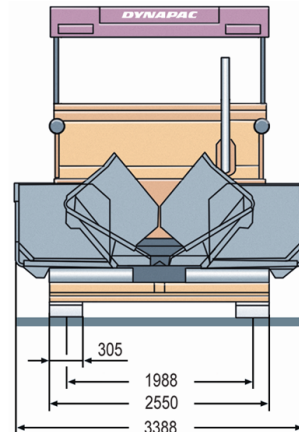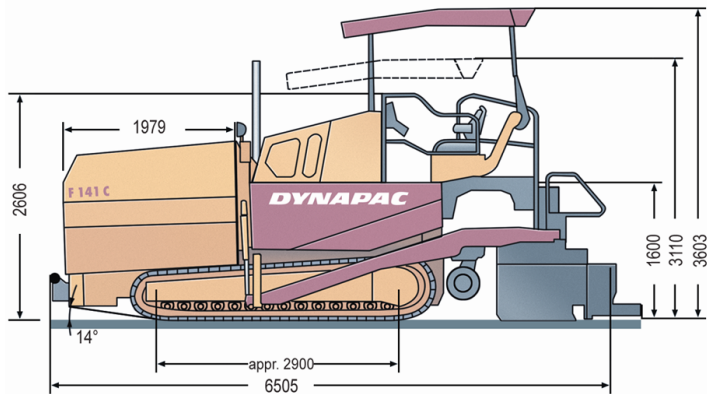

Dimensions	F141C
Basic width	2.55 m
Working width, hydraulic extendable	5.10 m
Working width, maximum (incl. extension boxes)	9 m
Working width, minimum (with reducing shoe)	2 m
Masses	
Weight	18.50 t
Capacity	
Placement thickness (max)	300 mm
Theoretical placement capacity	750 t/h
Traction	
Transport speed	4.50 m/s
Working speed	0–23 m/min
Undercarriage	
Crawler length	2,900 mm
Crawler width	305 mm
Final drive	Hydrostatically - direct drives comprising planetary gear units and hydraulic oil motors, integrated in crawler track frame
Material hopper	
Capacity	13 t
Capacity	6 m ³
Dumping height, center	520 mm
Dumping height, outside	600 mm
Hopper width, internal	3,388 mm
Auger	
Auger diameter	380 mm
Auger control	Proportional speed control. Left and right augers to be controlled separately. Reversible direction of rotation.
Engine	
Manufacturer	Deutz
Type	TCD 2013 L06
Rated power	190 hp
Rated power	140 kW
Rated power @	1,800 rpm
Electrical system	24V
Emissions according to	EU 3A / Tier 3

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.